
2026-11-13 18:03:14




## RB 210-30/V2/ER--X-NPP

Insert bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

CSB210 UE210.SH GAY210-XL-NPP

FHSR210

## 技术信息

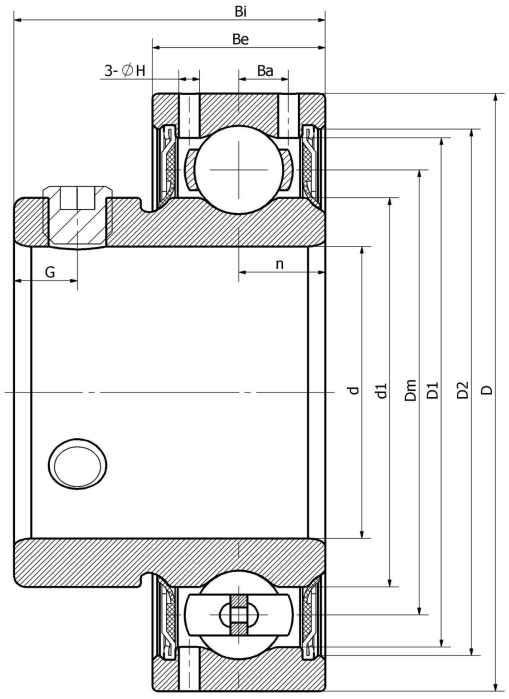


**主要尺寸和性能参数**

| | | |
|---|---|---|
| d | 47.625mm | Inside diameter |
| D | 90mm | Outside diameter |
| d1 | 登录可见尺寸，去登录 | Outer diameter innering |
| Dm | 70mm | Center diameter |
| D1 | 登录可见尺寸，去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸，去登录 | Seal groove diameter |
| Be | 22mm | Outer ring height |
| n | 11mm | channel distance |
| Bi | 43mm | Inner ring height |
| G | 8.5mm | Set screw hole distance |
| (UNF) | 3/8-24 | Set screw specifications |
| Cr | 35300N | Radial static load rating |
| Cor | 23200N | Radial dynamic load rating |
| ≈m | 0.8Kg | weight |

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承