
2026-11-13 18:23:10




## NC 209-24 T/G/V3/ERT--F

Insert bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GR209

# 技术信息

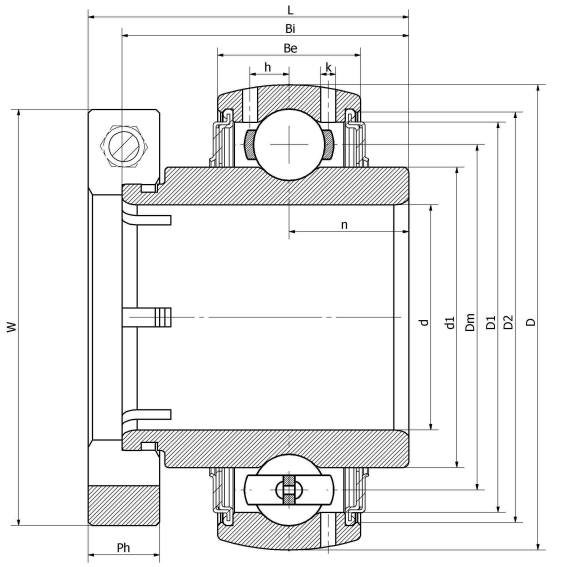


**主要尺寸和性能参数**

| | | |
|---|---|---|
| d | 38.1mm | Inside diameter |
| D | 85mm | Outside diameter |
| d1 | 登录可见尺寸，去登录 | Outer diameter innering |
| Dm | 66mm | Center diameter |
| D1 | 登录可见尺寸，去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸，去登录 | Seal groove diameter |
| W | 63.5mm | Eccentric sleeve outer diameter |
| Be | 22mm | Outer ring height |
| h | 6.5mm | Oil hole distance |
| k | 1.9mm | Oil hole diameter |
| n | 19mm | channel distance |
| Bi | 49.2mm | Inner ring height |
| L | 62.7mm | total height |
| Ph | 18.3mm | Eccentric sleeve height |
| (UNF) | 5/16-24 | Set screw specifications |
| Cr | 32800N | Radial static load rating |
| Cor | 20700N | Radial dynamic load rating |
| ≈m | 0.75Kg | weight |

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承