
2026-11-13 17:59:43



## SER 212-39B/G/L2/C12/G2--F

Insert bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

## 技术信息

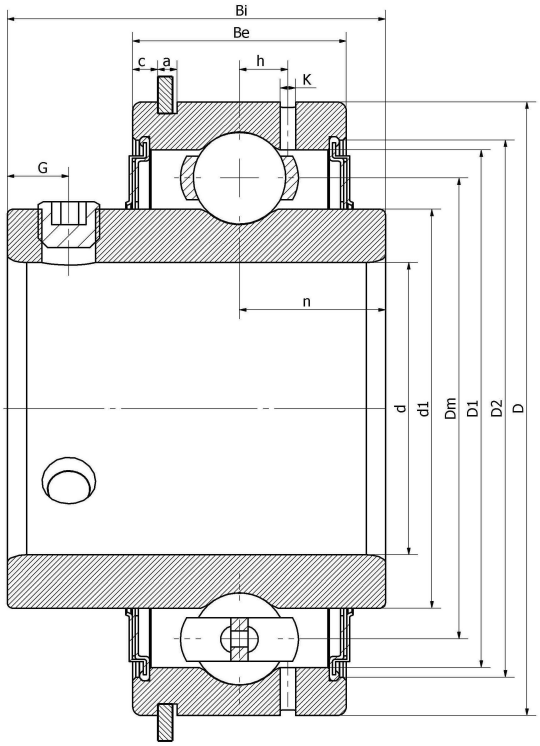


**主要尺寸和性能参数**

| | | |
|---|---|---|
| d | 61.9125mm | Inside diameter |
| D | 110mm | Outside diameter |
| d1 | 登录可见尺寸，去登录 | Outer diameter innering |
| Dm | 85mm | Center diameter |
| D1 | 登录可见尺寸，去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸，去登录 | Seal groove diameter |
| Be | 31.8mm | Outer ring height |
| h | 8.2mm | Oil hole distance |
| k | 1.8mm | Oil hole diameter |
| n | 25.4mm | channel distance |
| Bi | 65.1mm | Inner ring height |
| G | 10.5mm | Set screw hole distance |
| (UNF) | 3/8-24 | Set screw specifications |
| Cr | 52500N | Radial static load rating |
| Cor | 22000N | Radial dynamic load rating |
| ≈m | 1.55Kg | weight |

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承