



### NA316/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GNE80KRRB3


UEL316 L3

HC316 L3

G316 R3

EX316 L3

## 技术信息

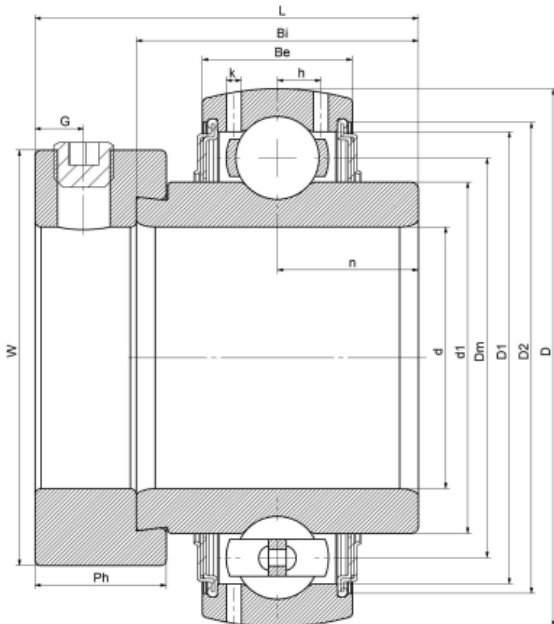

### 主要尺寸和性能参数

d	80mm	Inside diameter
D	170mm	Outside diameter
d1	登录可见尺寸, 去登录	Outer diameter innering
d1	125mm	Center diameter
D1	登录可见尺寸, 去登录	Outer ring inner diameter
D2	登录可见尺寸, 去登录	Seal groove diameter
W	119mm	Eccentric sleeve outer diameter
Be	48mm	Outer ring height
h	14mm	Oil hole distance
n	40.5mm	channel distance
Bi	81mm	Inner ring height
L	106.2mm	total height
G	13mm	Set screw hole distance
Ph	31.8mm	Eccentric sleeve height
(UNF)	M16*1.5	Set screw specifications
Cr	122970N	Radial static load rating
Cor	86590N	Radial dynamic load rating
≈m	6.7Kg	weight

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-8509111

地址: 河北省临西县城北环路北侧-中达轴承