



NA311/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GNE55KRRB3


UEL311 L3

HC311 L3

G311 R3

EX311 L3

技术信息

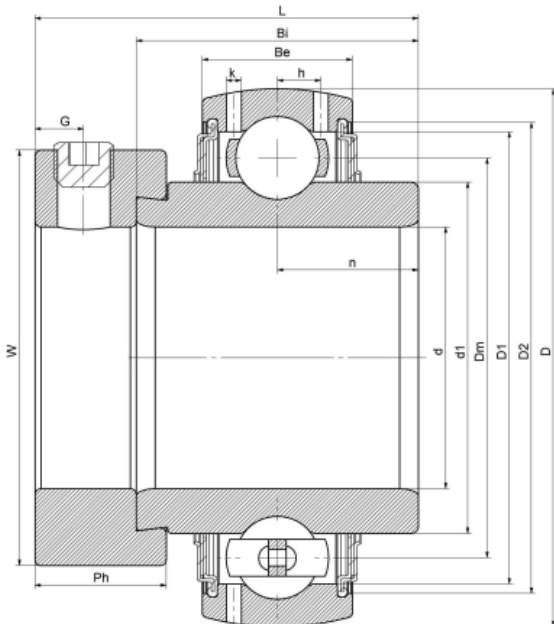

主要尺寸和性能参数

| | | |
|-------|-------------|---------------------------------|
| d | 55mm | Inside diameter |
| D | 120mm | Outside diameter |
| d1 | 登录可见尺寸, 去登录 | Outer diameter innering |
| d1 | 88.5mm | Center diameter |
| D1 | 登录可见尺寸, 去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸, 去登录 | Seal groove diameter |
| W | 83mm | Eccentric sleeve outer diameter |
| Be | 34mm | Outer ring height |
| h | 10.6mm | Oil hole distance |
| n | 27.8mm | channel distance |
| Bi | 55.6mm | Inner ring height |
| L | 73mm | total height |
| G | 8.5mm | Set screw hole distance |
| Ph | 22.2mm | Eccentric sleeve height |
| (UNF) | M10*1.25 | Set screw specifications |
| Cr | 61800N | Radial static load rating |
| Cor | 37800N | Radial dynamic load rating |
| ≈m | 1.85Kg | weight |

联系方式: 邮箱: mr.suo@zrbearing.net

电话: 0319-5628888

地址: 河北省临西县城北环路北侧-中达轴承