2026-11-14 09:01:31




NA310/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GNE50KRRB3　　UEL310 L3　　HC310 L3

G310R3　　EX310 L3

技术信息

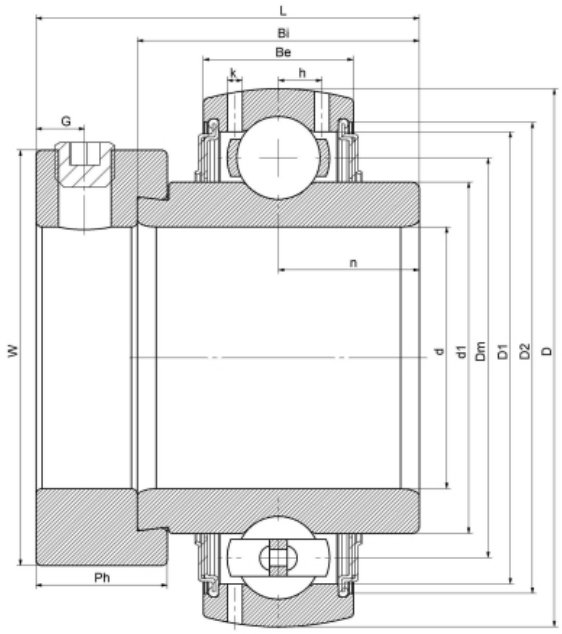

主要尺寸和性能参数

d	50mm	Inside diameter
D	110mm	Outside diameter
d1	登录可见尺寸，去登录	Outer diameter innering
d1	80.5mm	Center diameter
D1	登录可见尺寸，去登录	Outer ring inner diameter
D2	登录可见尺寸，去登录	Seal groove diameter
W	76.2mm	Eccentric sleeve outer diameter
Be	32mm	Outer ring height
h	10.2mm	Oil hole distance
n	24.6mm	channel distance
Bi	49.2mm	Inner ring height
L	66.4mm	total height
G	8.5mm	Set screw hole distance
Ph	22.2mm	Eccentric sleeve height
(UNF)	M10*1.25	Set screw specifications
Cr	53000N	Radial static load rating
Cor	31900N	Radial dynamic load rating
≈m	1.5Kg	weight

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承