2026-11-13 16:52:02




## NA310-30/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

UEL310-30 L3　　HC310-30 L3　　G310-30R3

EX310-30 L3

## 技术信息

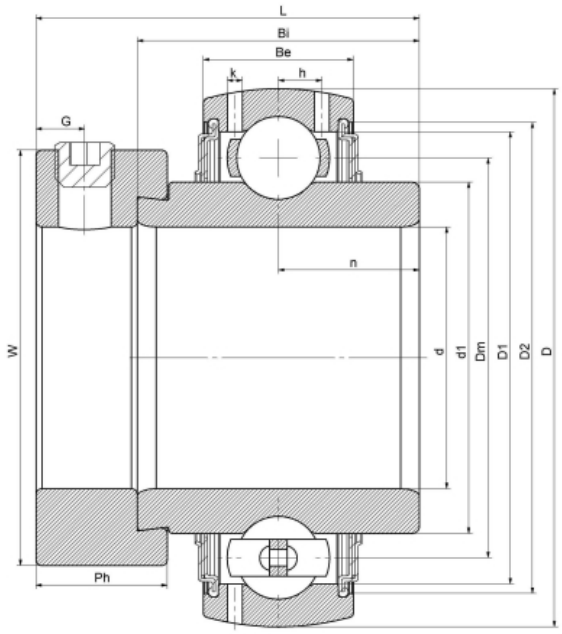


**主要尺寸和性能参数**

| | | |
|---|---|---|
| d | 47.63mm | Inside diameter |
| D | 110mm | Outside diameter |
| d1 | 登录可见尺寸，去登录 | Outer diameter innering |
| d1 | 80.5mm | Center diameter |
| D1 | 登录可见尺寸，去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸，去登录 | Seal groove diameter |
| W | 76.2mm | Eccentric sleeve outer diameter |
| Be | 32mm | Outer ring height |
| h | 10.2mm | Oil hole distance |
| n | 24.6mm | channel distance |
| Bi | 49.2mm | Inner ring height |
| L | 66.4mm | total height |
| G | 8.5mm | Set screw hole distance |
| Ph | 22.2mm | Eccentric sleeve height |
| (UNF) | 3/8-24 | Set screw specifications |
| Cr | 53000N | Radial static load rating |
| Cor | 31900N | Radial dynamic load rating |
| ≈m | 1.5Kg | weight |

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承