2026-11-13 17:46:41




NA308-25/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

UEL308-25 L3　　HC308-25 L3　　G308-25 R3

EX308-25 L3

技术信息

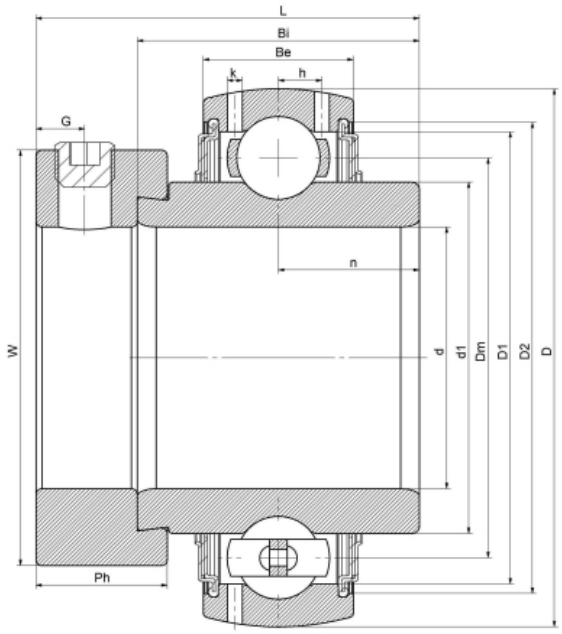

主要尺寸和性能参数

d	39.69mm	Inside diameter
D	90mm	Outside diameter
d1	登录可见尺寸，去登录	Outer diameter innering
d1	65.5mm	Center diameter
D1	登录可见尺寸，去登录	Outer ring inner diameter
D2	登录可见尺寸，去登录	Seal groove diameter
W	63.5mm	Eccentric sleeve outer diameter
Be	28mm	Outer ring height
h	7.8mm	Oil hole distance
n	19.8mm	channel distance
Bi	41.3mm	Inner ring height
L	56.9mm	total height
G	8mm	Set screw hole distance
Ph	20.6mm	Eccentric sleeve height
(UNF)	3/8-24	Set screw specifications
Cr	33500N	Radial static load rating
Cor	19200N	Radial dynamic load rating
≈m	0.8Kg	weight

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。

联系方式：邮箱：mr.suo@zrbearing.net Tel: +86 0319 5628888 地址：河北省临西县城北环路北侧-中达轴承