



### NA214/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GE70 KRRB3

UEL214 L3


HC214 L3

YEL214

G214 R3

EX214 L3

### 技术信息

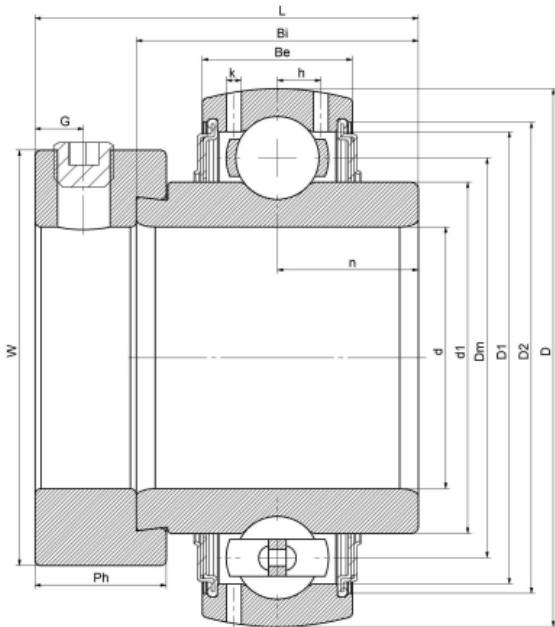

#### 主要尺寸和性能参数

d	70mm	Inside diameter
D	125mm	Outside diameter
d1	登录可见尺寸, 去登录	Outer diameter innering
d1	97.5mm	Center diameter
D1	登录可见尺寸, 去登录	Outer ring inner diameter
D2	登录可见尺寸, 去登录	Seal groove diameter
W	97mm	Eccentric sleeve outer diameter
Be	30mm	Outer ring height
h	9mm	Oil hole distance
n	34.1mm	channel distance
Bi	68.2mm	Inner ring height
L	85.5mm	total height
G	8.5mm	Set screw hole distance
Ph	23.9mm	Eccentric sleeve height
(UNF)	M10*1.25	Set screw specifications
Cr	62300N	Radial static load rating
Cor	45000N	Radial dynamic load rating
≈m	2.65Kg	weight

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-5628888

地址: 河北省临西县城北环路北侧-中达轴承