2026-01-10 03:32:01

NA208/V3/ER--RB3

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GE40 KRRB3	UEL208 L3	HC208 L3
YEL208	G208 R3	EX208 L3

技术信息

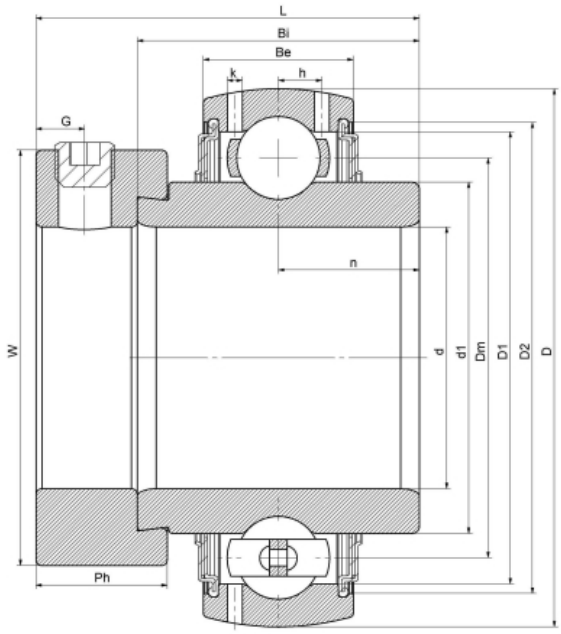

主要尺寸和性能参数

d	40mm	Inside diameter
D	80mm	Outside diameter
d1	登录可见尺寸，去登录	Outer diameter innering
d1	60mm	Center diameter
D1	登录可见尺寸，去登录	Outer ring inner diameter
D2	登录可见尺寸，去登录	Seal groove diameter
W	60.3mm	Eccentric sleeve outer diameter
Be	21mm	Outer ring height
h	6.4mm	Oil hole distance
n	21.4mm	channel distance
Bi	42.8mm	Inner ring height
L	56.1mm	total height
G	6.5mm	Set screw hole distance
Ph	18.3mm	Eccentric sleeve height
(UNF)	M8*1	Set screw specifications
Cr	29300N	Radial static load rating
Cor	18200N	Radial dynamic load rating
≈m	0.8Kg	weight

*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。 您可通过我们网站上的联系表了解更多信息。