



### SA 212/V4/ER--X-NPP


Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GRAE60-XL-NPP-B-  
FA125

UY 212 2S

YEL 212-2F

## 技术信息

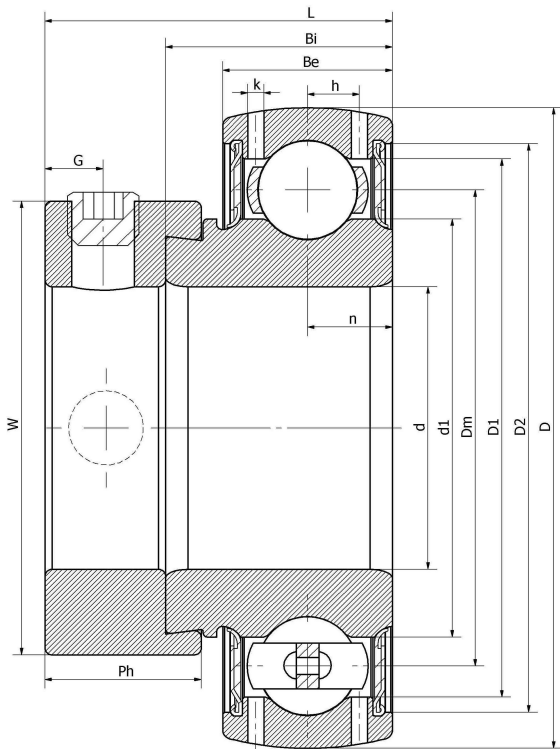

### 主要尺寸和性能参数

|       |             |                                 |
|-------|-------------|---------------------------------|
| d     | 60mm        | Inside diameter                 |
| D     | 110mm       | Outside diameter                |
| d1    | 登录可见尺寸, 去登录 | Outer diameter innering         |
| Dm    | 85mm        | Center diameter                 |
| D1    | 登录可见尺寸, 去登录 | Outer ring inner diameter       |
| D2    | 登录可见尺寸, 去登录 | Seal groove diameter            |
| W     | 84.2mm      | Eccentric sleeve outer diameter |
| Be    | 24mm        | Outer ring height               |
| h     | 8.2mm       | Oil hole distance               |
| k     | 1.8mm       | Oil hole diameter               |
| n     | 12mm        | channel distance                |
| Bi    | 33.4mm      | Inner ring height               |
| L     | 49.1mm      | total height                    |
| G     | 8mm         | Set screw hole distance         |
| Ph    | 22.3mm      | Eccentric sleeve height         |
| (UNF) | M10*1.25    | Set screw specifications        |
| Cr    | 52460N      | Radial static load rating       |
| Cor   | 32850N      | Radial dynamic load rating      |
| ≈m    | 1.2KG       | weight                          |

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-5628888

地址: 河北省临西县城北环路北侧-中达轴承