



SA 210-32/V4/ER--X-NPP


Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

EN210-32 S

1250 - 2 ECG

FH210 -32G

技术信息

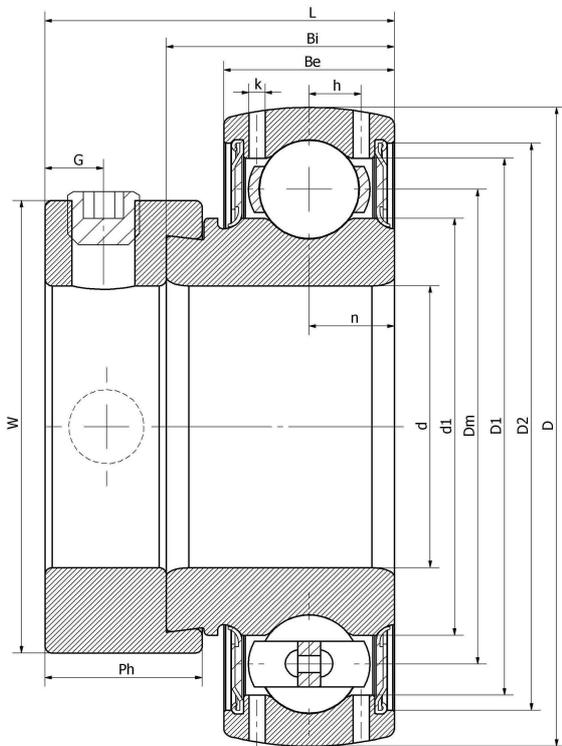

主要尺寸和性能参数

| | | |
|-------|-------------|---------------------------------|
| d | 50.8mm | Inside diameter |
| D | 90mm | Outside diameter |
| d1 | 登录可见尺寸, 去登录 | Outer diameter innering |
| Dm | 70mm | Center diameter |
| D1 | 登录可见尺寸, 去登录 | Outer ring inner diameter |
| D2 | 登录可见尺寸, 去登录 | Seal groove diameter |
| W | 69.9mm | Eccentric sleeve outer diameter |
| Be | 20mm | Outer ring height |
| h | 6.8mm | Oil hole distance |
| k | 2mm | Oil hole diameter |
| n | 11mm | channel distance |
| Bi | 30.2mm | Inner ring height |
| L | 43.5mm | total height |
| G | 6.5mm | Set screw hole distance |
| Ph | 18.3mm | Eccentric sleeve height |
| (UNF) | 5/16-24 | Set screw specifications |
| Cr | 35300N | Radial static load rating |
| Cor | 23240N | Radial dynamic load rating |
| ≈m | 0.79KG | weight |

联系方式: 邮箱: mr.suo@zrbearing.net

电话: 0319-8509111

地址: 河北省临西县城北环路北侧-中达轴承