




## UY 217/80 2S.T

Agricultural machinery bearings

### 技术信息

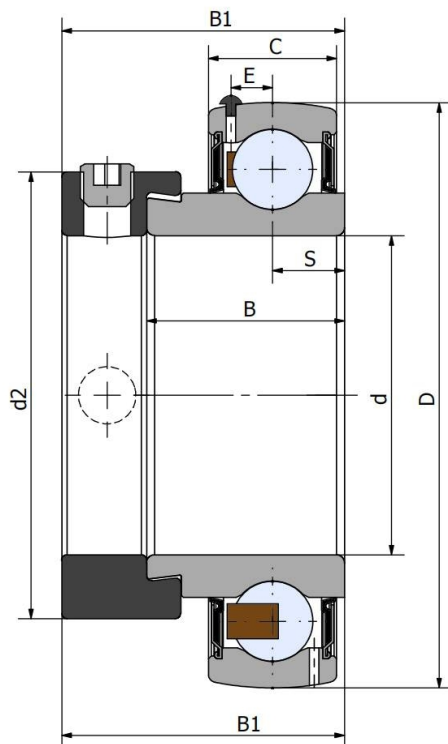

#### 主要尺寸和性能参数

|     |             |  |
|-----|-------------|--|
| d1  | 80mm        | Bore diameter  |
| D   | 150mm       | Outside diameter   |
| d1  | 登录可见尺寸, 去登录 | Outer diameter innering                                  |
| d2  | 112.5mm     | locking collar ooutside diameter                         |
| C   | 39mm        | Width outer ring   |
| B   | 53.2mm      | Width inner ring   |
| B1  | 71mm        | Width inner ring with locking collar                     |
| E   | 12mm        | Distance from raceway centre to the hole for lubrication |
| s   | 22.5mm      | Distance from inner ring side face to raceway centre     |
| ≈m  | 3.6Kg       | weight   |
| Cor | 85Kn        | Radial dynamic load rating                               |
| Cr  | 65Kn        | Radial static load rating                                |
| Pu  | 2.73Kn      | Fatigue load limit                                       |

\*数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-5628888

地址: 河北省临西县城北环路北侧-中达轴承