




### SA 203/V4/ER--X-NPP

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GRAE17-XL-NPP-B	KH 203 AE	16203
SA 203	EN 203	AEL 203 W 3
1217 - 17 ECG	YET 203	1217 - 17 ECG
UY 203 2S	FH203 -17mmG	ES203 G2

### 技术信息

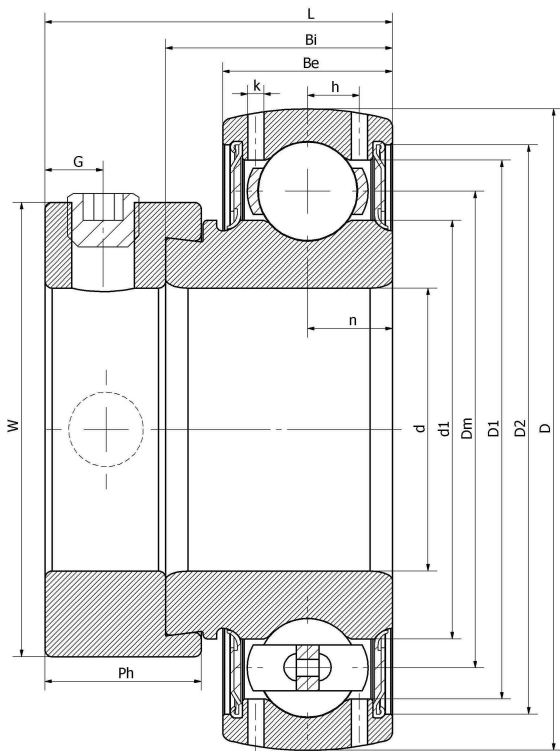

#### 主要尺寸和性能参数

d	17mm	Inside diameter
D	40mm	Outside diameter
d1	登录可见尺寸, 去登录	Outer diameter innering
Dm	29mm	Center diameter
D1	登录可见尺寸, 去登录	Outer ring inner diameter
D2	登录可见尺寸, 去登录	Seal groove diameter
W	28.6mm	Eccentric sleeve outer diameter
Be	12mm	Outer ring height
h	3.6mm	Oil hole distance
k	1.2mm	Oil hole diameter
n	6.5mm	channel distance
Bi	19.1mm	Inner ring height
L	28.4mm	total height
G	5mm	Set screw hole distance
Ph	13.5mm	Eccentric sleeve height
(UNF)	M6*1	Set screw specifications
Cr	9510N	Radial static load rating
Cor	4805N	Radial dynamic load rating
≈m	0.14KG	weight

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-8509111

地址: 河北省临西县城北环路北侧-中达轴承