




### SA 210-31/V4/ER--X-NPP

Insert spherical bearings, eccentric sleeve locked outer spherical bearings, three-layer sealed outer spherical bearings

GRA115-NPP-B-AS2/V	KH 210 - 31 BE	GRA 115 RRB
KH 210 - 31 BE	EN 210 - 31 S	1250 - 1 15/16 ECG
YET 210 - 115	FH210 -31G	

## 技术信息

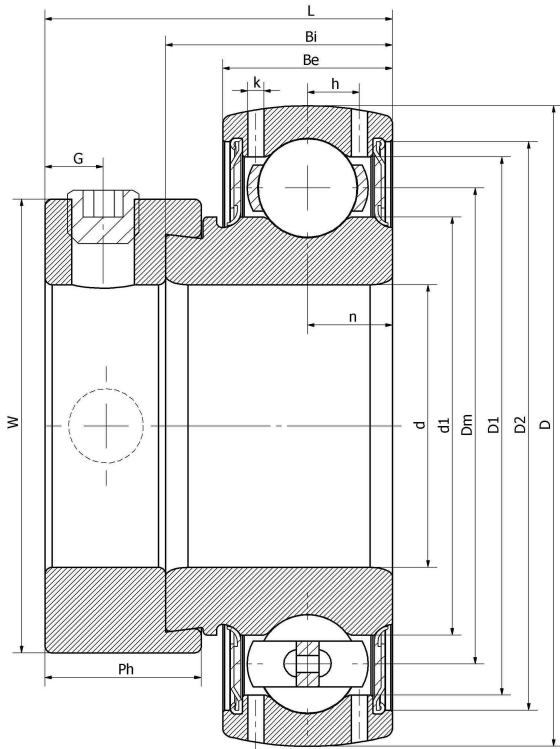

### 主要尺寸和性能参数

d	49.2125mm	Inside diameter
D	90mm	Outside diameter
d1	登录可见尺寸, 去登录	Outer diameter innering
Dm	70mm	Center diameter
D1	登录可见尺寸, 去登录	Outer ring inner diameter
D2	登录可见尺寸, 去登录	Seal groove diameter
W	69.9mm	Eccentric sleeve outer diameter
Be	20mm	Outer ring height
h	6.8mm	Oil hole distance
k	2mm	Oil hole diameter
n	11mm	channel distance
Bi	30.2mm	Inner ring height
L	43.5mm	total height
G	6.5mm	Set screw hole distance
Ph	18.3mm	Eccentric sleeve height
(UNF)	5/16-24	Set screw specifications
Cr	35300N	Radial static load rating
Cor	23240N	Radial dynamic load rating
≈m	0.79KG	weight

联系方式: 邮箱: [mr.suo@zrbearing.net](mailto:mr.suo@zrbearing.net)

电话: 0319-8509111

地址: 河北省临西县城北环路北侧-中达轴承